



» TECHNICAL BULLETIN

ColorMatrix™ SmartHeat™ RHC

ColorMatrix™ SmartHeat™ RHC is a formulated liquid bottle-blowing process aid. Suitable for PET and rPET preforms and bottles, it can be added to preforms providing the following benefits:

- Improved blowing performance
- Potential for increased rPET content
- Increased mechanical strength
- Potential for lightweighting
- Improved performance through the recycle process
- Reduced energy consumption
- No pre-drying requirements

SmartHeat RHC can contribute towards improved productivity, reduced manufacturing costs, improved sustainability, and can broaden the scope for bottle design. Its benefits are realized only with transparent preforms in a 2-stage injection stretch blow-molding process.


RECYCLING

SmartHeat RHC is APR accredited and EPBP approved.

PERFORMANCE


Increased Bottle Strength

(Based on 14.5g 0.5L bottles)

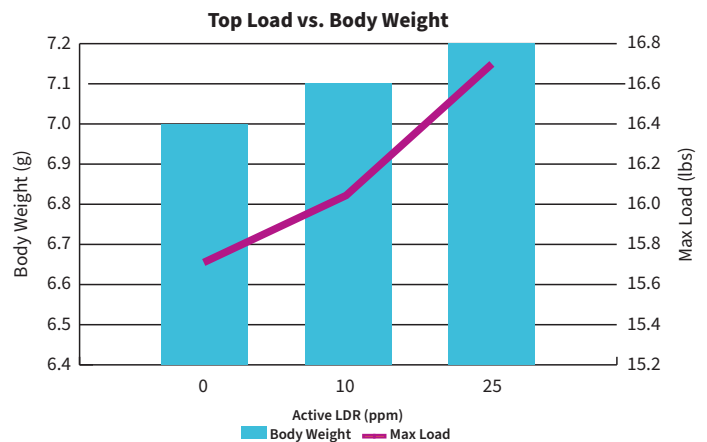

Up to 25% Energy Saving Potential

(Based on commercial blowing line 51,000bph 8.5g 0.5L bottles)

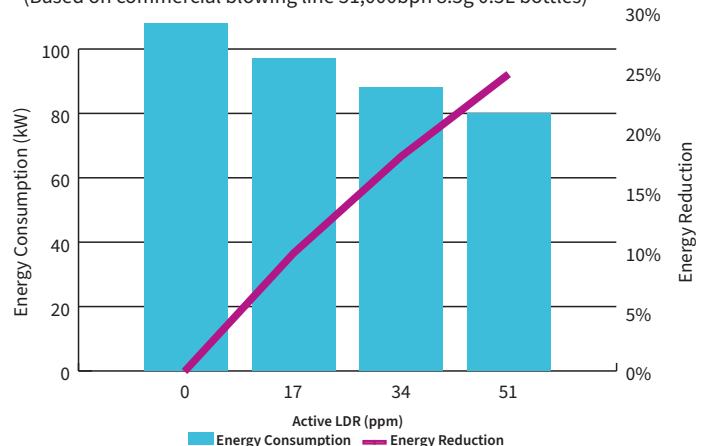



TYPICAL GENERAL PROPERTIES¹

Test Description	Test Method	Units	Typical Values
Viscosity	Avient Method	cP	6,000–10,000
Density	Avient Method	Lbs/gal	7.9–8.9
Color Variance	Avient Method	ΔE	0.0–1.0
Color Appearance	Visual	—	Slight Blue
Dispersion Pressout	Visual	—	Pass
Opacity: Visual	Visual	—	Pass

¹Typical values are not to be construed as specifications. COA are supplied separate with products.

PROCESSING & HANDLING

SmartHeat RHC is supplied in Avient’s ColorMatrix approved packaging and is active as supplied. It is metered into the PET stream just above the extruder feed throat of the injection molding machine using an Avient-supplied ColorMatrix dosing system. It should not be used in combination with dosing systems not supplied by Avient.

Melt processing of SmartHeat RHC is carried out at typical PET processing conditions at recommended dose rates, which range from .02% to .075%. It can be supplied as a stand-alone product or as a combination product, where it can be incorporated into a liquid color, acetaldehyde scavenger, or UV light barrier additive.

Once incorporated into the preform, no further action is necessary. Performance can be observed and supported during the bottle blowing process through optimization of the lamps, resulting in decreased energy consumption due to increased absorption of heat into the preform.

STORAGE

It is recommended that packages of SmartHeat RHC are stored under ambient conditions (between 10°C and 25°C) for optimal storage stability and dosing.

In order to maximize product quality, it is recommended that strict product rotation is applied to all incoming stock to minimize extended storage periods.

The anticipated shelf life of SmartHeat RHC is 60–90 days, after which settling out can occur. The product will remain active, however re-mixing may be required for re-homogenization. Further information regarding shelf life can be obtained from your local sales representative.

FOOD CONTACT

SmartHeat RHC has food contact approvals shown in the table below. For information about food contact approval status for any other regions, please contact your local sales representative.

	EU	FDA	Mercosur
SmartHeat RHC	Yes	Yes	Yes

PACKAGING

Package Type	Quantity
5G Pail	Up to 40 lbs
Planetpak	Up to 40 lbs

1.844.4AVIENT
www.avient.com



Copyright © 2025, Avient Corporation. Avient makes no representations, guarantees, or warranties of any kind with respect to the information contained in this document about its accuracy, suitability for particular applications, or the results obtained or obtainable using the information. Some of the information arises from laboratory work with small-scale equipment which may not provide a reliable indication of performance or properties obtained or obtainable on larger-scale equipment. Values reported as “typical” or stated without a range do not state minimum or maximum properties; consult your sales representative for property ranges and min/max specifications. Processing conditions can cause material properties to shift from the values stated in the information. Avient makes no warranties or guarantees respecting suitability of either Avient’s products or the information for your process or end-use application. You have the responsibility to conduct full-scale end-product performance testing to determine suitability in your application, and you assume all risk and liability arising from your use of the information and/or use or handling of any product. AVIENT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, either with respect to the information or products reflected by the information. This literature shall NOT operate as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner.